



COMMERCIAL
PRODUCTS™


20 Ton



BHH2003 Horizontal Log Splitter

- 20 ton splitting force
- 12 second cycle time
- 6.5 HP (206cc) Horizontal Shaft Engine

This commercial grade log splitter is engineered and built to handle the toughest jobs. The special horizontal design allows for high production operation with the use of a conveyor or bucket. Iron & Oak's rigid quality control and component testing help ensure years of productive, reliable service, and an attractive powder coat finish provides the finest protection available. Since 1982, the name Iron & Oak has stood for quality and reliability when it comes to log splitters and wood processing products.

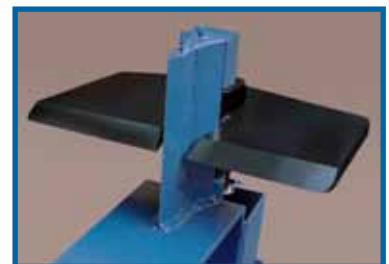

Four-Way Wedge (optional)



Made in the U.S.A.

BHH2003 Horizontal Log Splitter



Iron & Oak – the finest commercial grade log splitter on the market today!

- Rugged, heavy-duty construction for years of exceptional service
- Horizontal design for convenient use with conveyor or bucket
- Rigid quality control during manufacturing ensures greater reliability
- Factory testing of all major components and hydraulic tank
- Powder coated finish for the best appearance and weather protection
- Year-round manufacturing, parts, and support

MECHANICAL SPECIFICATIONS

Beam	Heavy-duty 6 inch H-Beam
Wedge	9 inch high carbon steel, (optional 4-way wedge)
Force/Tonnage	20 ton
Cylinder Stroke	24 inches
Log Opening	24.5 inch maximum
Cycle Time	12 seconds
Operating Position	Horizontal
Wheels & Tires	6.50 x 4.80 x 12 in. bolt-on wheels
Safety Chains	Standard
Hitch Coupler	2 inch locking ball (standard)
Engine	6.5 HP (206cc) B&S IC horizontal shaft engine Optional: 6.5 HP (206cc) B&S standard, 5.5 HP (160cc) Honda, 6 HP (169cc) Robin

HYDRAULIC SPECIFICATIONS

Cylinder Size	4" x 24" Clevis type cylinder, 1.75" rod
Hydraulic Tank	7.5 gallon capacity
Hydraulic System	9.5 gallon capacity
Hydraulic Oil Filter	Spin-on type, 60 micron filter
Safety Release Control Valve	Detent, auto return
Gear Pump	2-stage, 11 GPM
Hydraulic Oil	
Above 30° F	Use AW-32, 10W (non foaming) or ATF Dextron III
Below 30° F	Use only ATF Dextron III
Shipping Weight	630 lbs.

Cover photos may deviate slightly from actual units. Materials and specifications subject to change without notice.



**COMMERCIAL
PRODUCTS™**

Iron & Oak Commercial Products
410 W. Broadway Ave.
P.O. Box 577
Streator, Illinois 61364-0577
Phone: 815-672-8596 • Fax: 815-672-9073
E-mail: sales@logsplitters-ironoak.com

Web Site: www.logsplitters-ironoak.com